

# 22 Ton Capacity Heavy Duty Jack Stands

Model: ASM2806



# ASM HD

## INTENDED USE:

AutoSport Jacks Stands are to be used in identical pairs for supporting one end of a vehicle at a predetermined height.

## SPECIFICATIONS:

Capacity (Ton):	22
Min. Lift Height (in.):	12-3/8
Max. Lift Height (in.):	19-5/8
Saddle Size (in.):	3-7/16 x 3
Base Size (in.):	9-3/4 x 9-3/4
Weight (lb.):	60.4



## WARNING

- Study, understand, and follow all instructions before using these stands. Stand owner is responsible to have the manual and all warnings understood by all non-speaking English users in their own native language.
- Technician and any person near an operating jack under load shall wear eye protection that meets ANSI Z87.1 and OSHA Standards.
- Support areas of the vehicle as specified by the vehicle manufacturer.
- Use only as identical pair.
- Stands are not to be used to simultaneously support both ends of a vehicle. Use stands to support one end of a vehicle only.
- Maximum load capacity per identical pair shall not exceed the rated capacity of the individual stand.
- Use only on a hard, level surface capable of supporting load.
- Center load on saddles.
- No alterations or modifications shall be made to these stands.
- Failure to heed these warnings may result in property damage, personal injury or death.
- **⚠️WARNING:** Cancer and reproductive harm – [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

## SETUP

There is no specific setup required. The locating pin can be stored in the base of the stand and is secured to the stand by a wire tether to prevent loss.

## OPERATING INSTRUCTIONS

1. Consult the vehicle manufacturer for the designated support points.
2. Chock the vehicle wheels that will not be lifted off the ground. Turn the vehicle engine off and make sure that the vehicle transmission is in Park or in gear and then apply the emergency brake before lifting the vehicle.

3. Lift the vehicle a little higher than the desired work height and immediately place the jack stands underneath the vehicle's designated support points. **IMPORTANT:** Do not get under a vehicle to position or remove jack stands.
4. With the stand's locking pins removed, raise the stand's support columns as close to the designated support points as possible and insert the locking pins in the column hole closest to the stand's base collar. Make sure the locking pins are fully inserted and engaging both sides of the stand's base collars.
5. Slowly lower the vehicle on the stand columns making sure the stand's column saddles are centered on the vehicle support points. **IMPORTANT:** If during this procedure the stands seem unstable or the saddles are not centered on the load, raise the vehicle off the stands and make the required setup changes.
6. When removing stands from underneath a vehicle follow steps 1 and 2 and raise the vehicle high enough to clear the stands' saddles. Remove the stands from under the vehicle and slowly lower the vehicle to the ground.

## MAINTENANCE

1. The stand owner should develop a maintenance schedule based on its frequency of use and the environment to make sure there are no broken or cracked welds. Repair or replace as needed.
2. The stands shall not be stored out in the open or exposed to inclement weather. A stand with signs of rust and corrosion will not be eligible for warranty consideration.
3. The stand owner is responsible for keeping stand warning labels and the owner's manual legible and in a common place for all users to see.
4. Inspect the stands before each use to make sure there are no loose or missing parts, excessive wear, and they are operating as originally intended. In any adverse conditions, immediately remove the stands from service until repaired or replaced.

# 22 Ton Capacity Heavy Duty Jack Stands

Model: ASM2806




# ASM HD

## PARTS LIST AND DIAGRAM

Index	Ordering Part#	Ordering Part Description	Description	Qty
1			Base	1
2			Extension Tube	1
3	PRT2806-01	Safety Pin with Lanyard	Safety Pin	1
4			Lanyard	1

Note: Some parts are shown in the parts list to make it easy to understand the assembly or use of the product. As such, they may not be available individually as replacement parts.

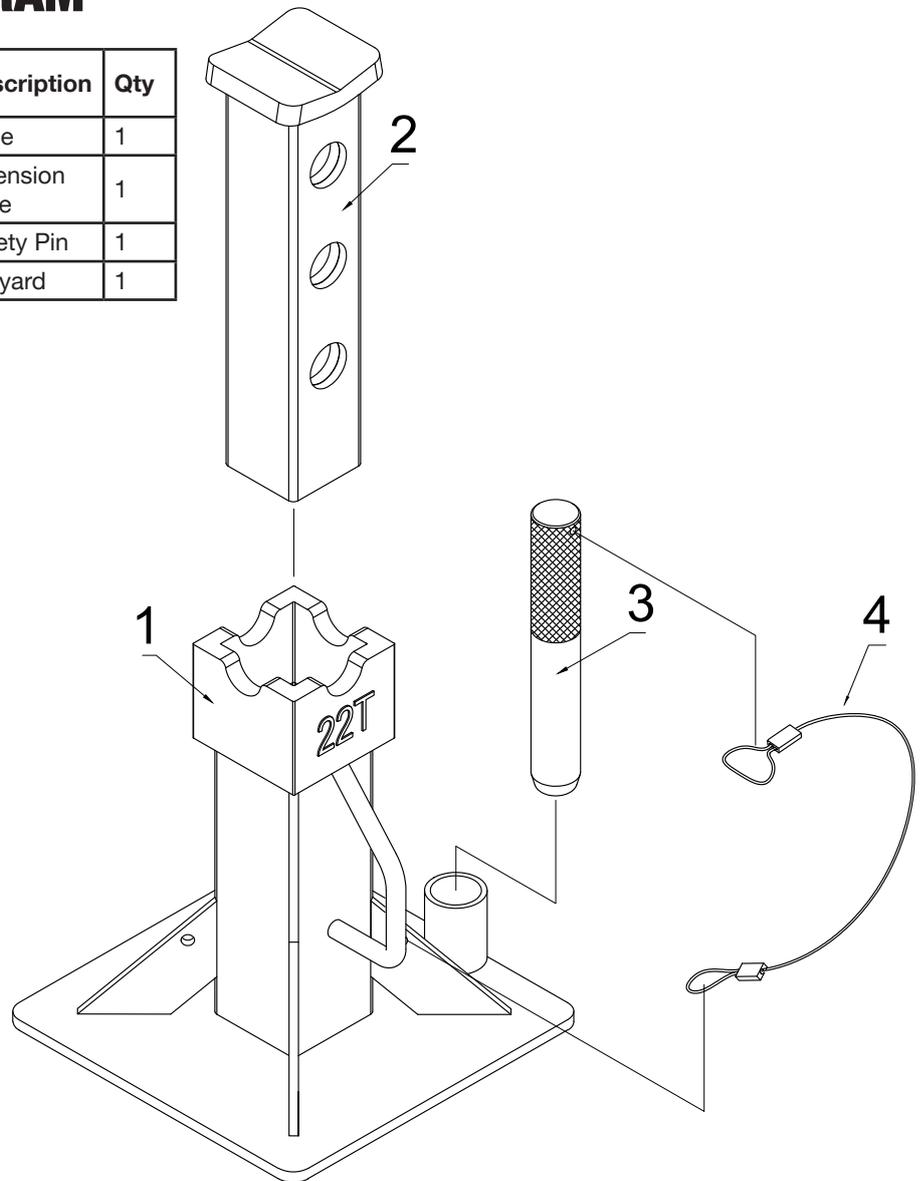

### 1-YEAR LIMITED WARRANTY

AutoSport MFG warrants that AutoSport branded products are free from defects in workmanship and materials. We will repair or replace products that fail to give satisfactory service due to workmanship or materials.

The warranty for AutoSport branded products is ONE YEAR from the date of the original purchase. The proof of purchase must be available for any warranty consideration. Repair or replacement shall be at the sole direction of AutoSport Mfg.

AutoSport warranty is administered where the original purchase was made. AutoSport MFG will not provide any warranty for any product subjected to misuse, modification, unreasonable use, neglect, lack of maintenance or use after the unit is significantly worn.

### CONTACT US

info@ASM-HD.com  
www.autosportmfg.com