

EQUAL FLEXX




Installation Instructions

Before installing FLEXX, read the quantity chart.

1. Simply drop the FLEXX bag into the tire before mounting.
Do not tear or open bag.
2. Mount the tire on the wheel. Inflate and adjust the air pressure of the tire.
3. Install filtered valve core and identification sleeve.

Avoid over lubricating tire bead or installing FLEXX in tires filled with sealant.
Contents are non-toxic, environmentally safe, and non-flammable.

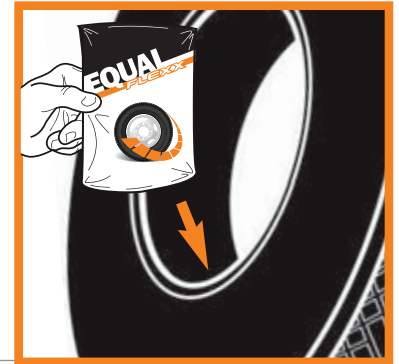

TPMS
COMPATIBLE

TMC
COMPLIANT

THE NEW WAY OF THE ROAD

FLEXX™ is the most scientifically refined internal wheel-end balancer available. It installs in seconds, and keeps fleets running smoothly year after year.



2X MORE VIBRATION ABSORPTION POWER

UP TO 15% BETTER PERFORMANCE

LOWEST ROLLING RESISTANCE, MORE EVEN TIRE WEAR AND THE SMOOTHEST RIDE

EASIEST TO USE

For quantities or tire sizes not listed, please visit imiproducts.com, call **800-233-7086** or email us at info@imiproducts.com. **Satisfaction guaranteed.**



COMMERCIAL TIRE APPLICATION CHART

Truck Tires

Tire Size		Wheel Position	
		Single	Dual
7.50	R18	E-4 oz.	D-6 oz.
8.00	R19.5	D-6 oz.	C-8 oz.
9.00	R19.5	D-6 oz.	C-8 oz.
18.00	R19.5	W-16 oz.	
225/70	R19.5	D-6 oz.	C-8 oz.
245/70	R19.5	D-6 oz.	C-8 oz.
265/70	R19.5	D-6 oz.	C-8 oz.
275/70	R19.5	C-8 oz.	B-10 oz.
285/70	R19.5	C-8 oz.	B-10 oz.
295/70	R19.5	C-8 oz.	B-10 oz.
305/70	R19.5	B-10 oz.	A-12 oz.
280/75	R19.5	C-8 oz.	B-10 oz.
445/65	R19.5	W-16 oz.	
525/65	R20.5	B+C+C = 26 oz.	
615/65	R20.5	A+A+B = 34 oz.	
7.50	R20	C-8 oz.	B-10 oz.
8.25	R20	C-8 oz.	B-10 oz.
9.00	R20	B-10 oz.	A-12 oz.
10.00	R20	B-10 oz.	A-12 oz.
11.00	R20	A-12 oz.	B+E = 14 oz.
12.00	R20	A-12 oz.	B+E = 14 oz.
12.50	R20	A-12 oz.	B+E = 14 oz.
13/80	R20	A-12 oz.	B+E = 14 oz.
14/80	R20	B+E = 14 oz.	W-16 oz.
14.00	R20	W-16 oz.	
16.00	R20	B+B = 20 oz.	
10.00	R22	B-10 oz.	A-12 oz.
11.00	R22	A-12 oz.	B+E = 14 oz.
9.00	R22.5	C-8 oz.	B-10 oz.
10.00	R22.5	B-10 oz.	A-12 oz.
11.00	R22.5	B-10 oz.	A-12 oz.
12.00	R22.5	A-12 oz.	B+E = 14 oz.
275/50	R22.5	B-10 oz.	A-12 oz.
235/70	R22.5	D-6 oz.	C-8 oz.
255/70	R22.5	C-8 oz.	B-10 oz.
11/70	R22.5	B-10 oz.	A-12 oz.
265/70	R22.5	C-8 oz.	B-10 oz.
295/60	R22.5	B-10 oz.	A-12 oz.

Tire Size		Wheel Position	
		Single	Dual
275/70	R22.5	B-10 oz.	A-12 oz.
305/70	R22.5	B-10 oz.	A-12 oz.
365/70	R22.5	B+E = 14 oz.	
315/70	R22.5	B-10 oz.	A-12 oz.
245/75	R22.5	C-8 oz.	B-10 oz.
265/75	R22.5	C-8 oz.	B-10 oz.
285/75	R22.5	B-10 oz.	A-12 oz.
295/75	R22.5	B-10 oz.	A-12 oz.
315/75	R22.5	A-12 oz.	B+E = 14 oz.
345/75	R22.5	A-12 oz.	
350/75	R22.5	B+E = 14 oz.	
235/80	R22.5	D-6 oz.	C-8 oz.
255/80	R22.5	C-8 oz.	B-10 oz.
275/80	R22.5	B-10 oz.	A-12 oz.
295/80	R22.5	A-12 oz.	B+E = 14 oz.
305/85	R22.5	A-12 oz.	B+E = 14 oz.
315/80	R22.5	A-12 oz.	B+E = 14 oz.
365/80	R22.5	B+E = 14 oz.	
445/50	R22.5	W-16 oz.	
455/50	R22.5	W-16 oz.	
385/65	R22.5	A-12 oz. hwy	W-16 oz. flotation
425/65	R22.5	W-16 oz.	
435/45	R22.5	B+E = 14 oz.	
445/55	R22.5	W-16 oz.	
445/65	R22.5	W-16 oz.	
495/45	R22.5	W-16 oz.	
15.00	R22.5	A-12 oz. hwy	W-16 oz. flotation
16.50	R22.5	W-16 oz.	
18.00	R22.5	W-16 oz.	
11.00	R24	A-12 oz.	B+E = 14 oz.
12.00	R24	B+E = 14 oz.	
14.00	R24	W-16 oz.	
285/75	R24.5	B-10 oz.	A-12 oz.
305/75	R24.5	A-12 oz.	B+E = 14 oz.
315/75	R24.5	A-12 oz.	B+E = 14 oz.
275/80	R24.5	B-10 oz.	A-12 oz.
295/80	R24.5	B-10 oz.	A-12 oz.
11.00	R24.5	B-10 oz.	A-12 oz.
12.00	R24.5	A-12 oz.	B+E = 14 oz.

Commercial Light Truck Tires

The following tire sizes apply only to light truck tires (must be LT rated) for commercial vehicles with dual wheel positions and a 10,000 GVW rating (Class 3) or higher. For light truck tires available in a heavy duty ply/load rating (10+), use the next FLEXX package size up (additional 2 oz). Example: A 215/75 R 17.5 light truck tire requires an E package (4 oz.) for normal application. For heavy duty rated tires a D package (6 oz.) is recommended.

Tire Size		Wheel Position	
		Single	Dual
195/70	R15	F-3 oz.	F-3 oz.
195/65	R16	F-3 oz.	F-3 oz.
305/70	R16	D-6 oz.	D-6 oz.
225/75	R16	F-3 oz.	F-3 oz.
245/75	R16	E-4 oz.	E-4 oz.
265/75	R16	E-4 oz.	E-4 oz.
285/75	R16	D-6 oz.	D-6 oz.
295/75	R16	D-6 oz.	D-6 oz.
315/75	R16	C-8 oz.	C-8 oz.
215/85	R16	F-3 oz.	F-3 oz.
225/85	R16	E-4 oz.	E-4 oz.
235/85	R16	E-4 oz.	E-4 oz.
245/85	R16	E-4 oz.	E-4 oz.
255/85	R16	D-6 oz.	D-6 oz.
265/85	R16	D-6 oz.	D-6 oz.
305/85	R16	C-8 oz.	C-8 oz.
7.50	R16	F-3 oz.	F-3 oz.
8.25	R16	E-4 oz.	E-4 oz.
11.00	R16	C-8 oz.	C-8 oz.
245/75	R17	E-4 oz.	E-4 oz.
265/70	R17	E-4 oz.	E-4 oz.
235/80	R17	E-4 oz.	E-4 oz.
315/70	R17	D-6 oz.	D-6 oz.

Tire Size		Wheel Position	
		Single	Dual
315/70	R17.5	C-8 oz.	C-8 oz.
195/60	R17.5	F-3 oz.	F-3 oz.
205/60	R17.5	F-3 oz.	F-3 oz.
225/60	R17.5	E-4 oz.	E-4 oz.
8.00	R17.5	E-4 oz.	E-4 oz.
8.50	R17.5	E-4 oz.	E-4 oz.
9.00	R17.5	D-6 oz.	D-6 oz.
10.00	R17.5	C-8 oz.	C-8 oz.
11.00	R17.5	B-10 oz.	B-10 oz.
14.00	R17.5	A-12 oz.	A-12 oz.
195/70	R17.5	F-3 oz.	F-3 oz.
215/70	R17.5	E-4 oz.	E-4 oz.
235/70	R17.5	E-4 oz.	E-4 oz.
205/75	R17.5	E-4 oz.	E-4 oz.
215/75	R17.5	E-4 oz.	D-6oz heavy trailer
225/75	R17.5	E-4 oz.	E-4 oz.
235/75	R17.5	D-6 oz.	D-6 oz.
205/80	R17.5	E-4 oz.	E-4 oz.
225/80	R17.5	E-4 oz.	E-4 oz.
225/90	R17.5	D-6 oz.	D-6 oz.
245/70	R18	D-6 oz.	D-6oz heavy trailer
275/65	R18	D-6 oz.	D-6 oz.




Installation Instructions

Before installing FLEXX, read the quantity chart.

- Simply drop the FLEXX bag into the tire before mounting. Do not tear or open bag.
- Mount the tire on the wheel. Inflate and adjust the air pressure of the tire.
- Install filtered valve core and identification sleeve.

Avoid over lubricating tire bead or installing FLEXX in tires filled with sealant. Contents are non-toxic, environmentally safe, and non-flammable.

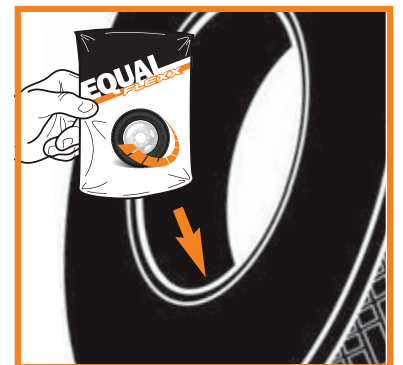

Rev. 5/18

WARNING: This product contains chemicals and/or sub-components that may cause cancer or reproductive harm per California Prop 65 - www.P65Warnings.ca.gov