

# Heavy-Duty Window Style Inflation Gauge

PHOENIX<sup>X</sup>

- **DURABILITY**

All metal components for reliability in heavy-duty applications  
Reinforced window guard protects measurement lens

- **ADVANCED ENGINEERING**

Single piece frame construction provides strength and rigidity  
Lightweight aluminum frame reduces user fatigue  
Recalibration feature offers ability to easily recalibrate gauge

- **SAFETY**

Frequent and accurate tire pressure checks reduce risk of tire damage and accidents  
Control valve stops inflation when trigger is released


- **EASE OF USE**

Large magnified window lens enables quick and easy measurements  
Ergonomic contoured trigger control provides slip resistance  
One trigger provides 3 way operation - inflate, deflate, and measure pressure without removing the chuck

- Air chuck type: straight dual foot, lock-on, 30° reverse
- Calibration: 10 - 160 psi
- Increments: 2.5 psi
- Air supply: ¼" FPT
- Hose length: 21"



Readings in  
2.5 psi. increments

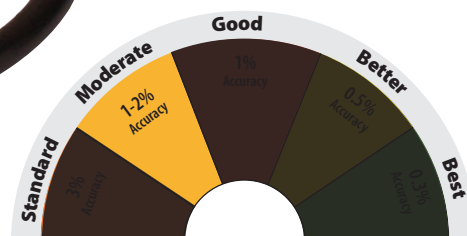

To Order  
**800-998-9897**  
myerstiresupply.com